




# CITY SQUARES

■ CARPET TILE ■

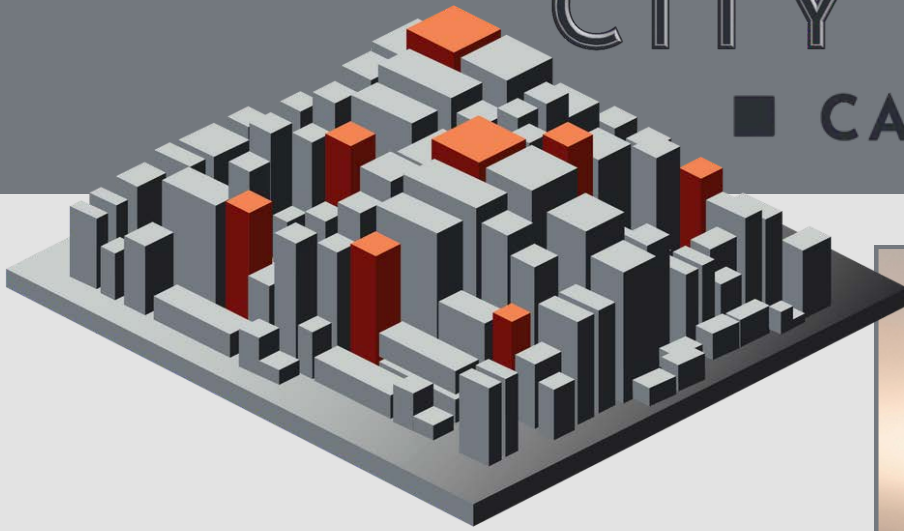


20" x 20"  
Carpet Tile with  
Ultra-Flex Backing

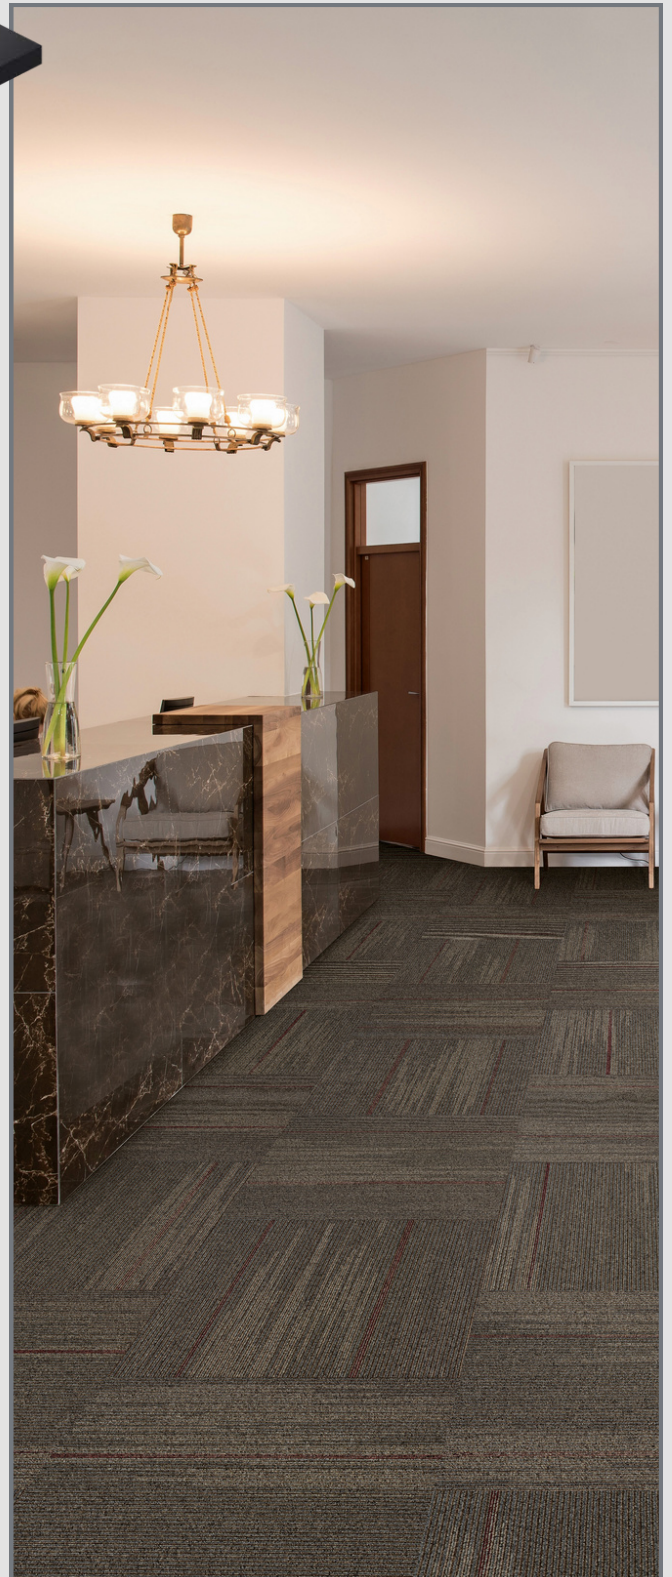


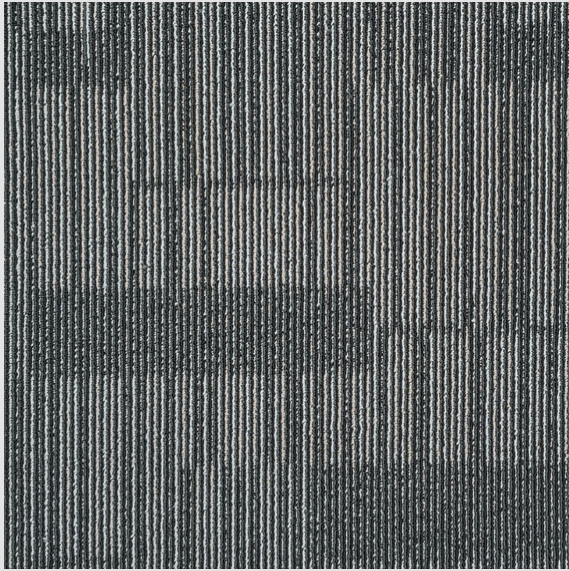

**7971 Portland**

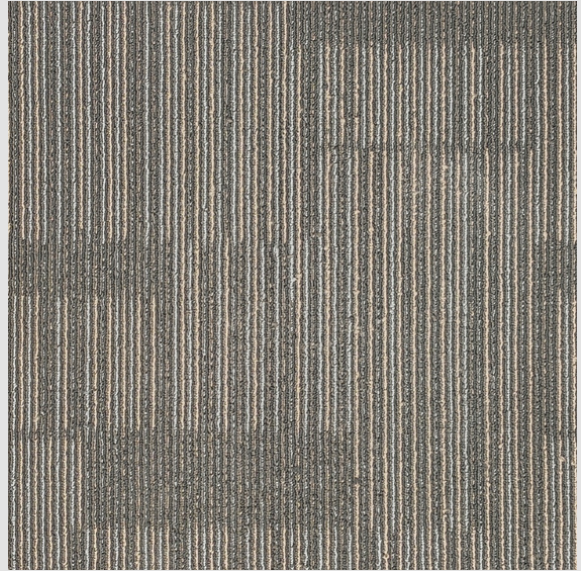

**7608 Madison**

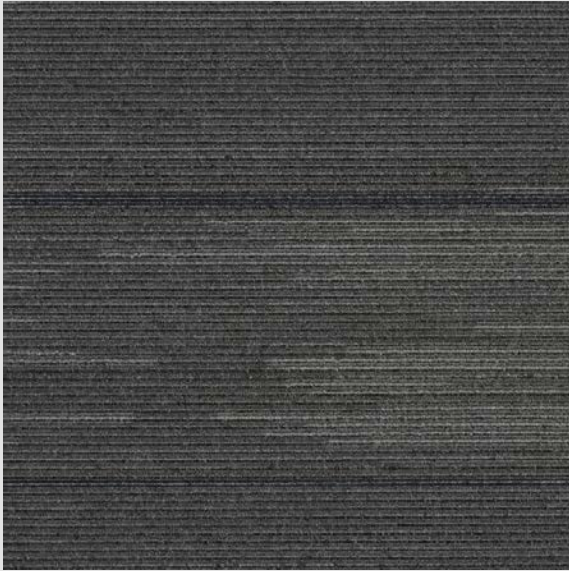

**7720 Denver**



**7518 Albany**



**7785 Topeka**



**7737 Austin**

# 7971 Portland



# 7608 Madison



# 7720 Denver



# 7518 Albany




# 7758 Topeka



# 7737 Austin





# CITY SQUARES

■ CARPET TILE ■


## PRODUCT SPECIFICATIONS

|                   |                                                          |
|-------------------|----------------------------------------------------------|
| STYLE NAME        | City Squares                                             |
| PRODUCT TYPE      | Carpet Tile                                              |
| CONSTRUCTION      | Multi-Level Pattern Loop                                 |
| FIBER             | PP                                                       |
| DYE METHOD        | Solution Dyed                                            |
| PRIMARY BACKING   | Synthetic                                                |
| SECONDARY BACKING | Ultra-Flex Backing                                       |
| PRODUCT SIZE      | 20" X 20"                                                |
| SY PER CARTON     | 6.57 sy                                                  |
| PIECES PER CARTON | 22                                                       |
| GAUGE             | 1/12                                                     |
| STITCHES          | 12/in                                                    |
| AVERAGE DENSITY   | 4900                                                     |
| TOTAL THICKNESS   | 0.239in                                                  |
| OVERALL WEIGHT    | 120 oz./sy                                               |
| WARRANTY          | 15 Year Commercial Limited Warranty with Stain and Color |


## PERFORMANCE TESTING

|                          |                                                                                                           |
|--------------------------|-----------------------------------------------------------------------------------------------------------|
| PILL TEST                | Pass                                                                                                      |
| RADIANT PANEL            | Class 1 / ASTM E648                                                                                       |
| NBS SMOKE                | Less than 450 / ASTM E662                                                                                 |
| ELECTROSTATIC PROPENSITY | Less than 3.5 kv / AATCC - 134                                                                            |
| CRI® GREENLABEL PLUS     | GLP8233                                                                                                   |
| ADA COMPLIANCE           | >0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes |

## RECOMMENDED INSTALLATION METHODS



QUARTER TURN

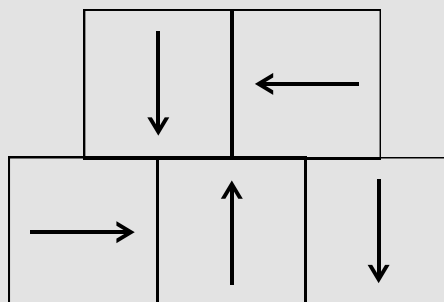

RANDOM

